



## Features


**Robust case with strong motor.**

**Projection screen fabric complies with the highest standard for fire safety (M1).**

**Pre-programmed mechanical fine-tuning of the roll/re-roll of the projection screen fabric facilitates rapid installation.**

**Strong motor with 5-year guarantee and CE quality mark.**

**Choice of mounting on wall and/or ceiling via flexibly placed brackets.**

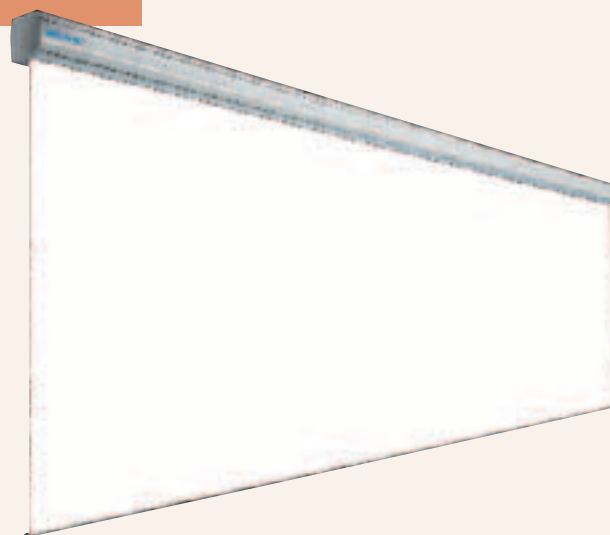




▲ Large screen projection screens available in widths from 4.5 to 7 metres.

## Technical characteristics (see also page 8).


- ▶ All projection screens are designed and manufactured according to DIN 19045 parts 1-5.
- ▶ Sturdy case. Equipped with anodised aluminium at the front and back and steel at the top, lacquered in grey (RAL 7035).
- ▶ Matte white P: vinyl foil; reflection value 1.0, viewing angle 50° L/R, weight approx. 480 gr/m<sup>2</sup> and thickness approx. 0.45 mm.
- ▶ The projection screen fabric has a horizontal weld every 1.9 metres which is invisible during projection. Projection screen fabrics satisfy the requirements for fire-resistance of construction materials and components.
- ▶ All of the electrical motors comply with the following international regulations concerning product safety, electrical safety and electro-magnetic compatibility: EN 60335; IEC 61000; 89/336/EWG; 89/392/EEG and supplements : 91/638/EEG and 93/44/EEG.
- ▶ Somfy motor with 17 RPM (revolutions per minute) and 240 Watts. Motor is mounted on the right.
- ▶ Motor equipped with electric brake to prevent unwanted roll out and thermal overload cut-out.
- ▶ Mounting brackets should be mounted within a maximum of 1 metre of the side of the case.
- ▶ Available with a 10-metre connection cable and separate switch.
- ▶ Projection screen is supplied in sturdy, wooden transport case.

## Accessories

- ▶ Infrared remote control has a range of 7 metres and comprises a wall box with infrared receiver and transmitter. PASEL 012
- ▶ Cordless radio frequency remote control for distances up to 30 metres. Three-part set comprising a control module, cordless switch and a transmitter. PASEL 013
- ▶ Key-switch to prevent undesired use. PASEL 009

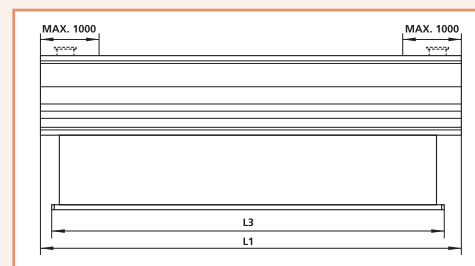

Screen size h x w cm	Case L1 mm	L3 mm	Net weight in kg	Up/down in sec.	Screen fabric Matte white P prod. code
400x450	4700	4580	112	32	PBSGS 015
450x450	4700	4580	115	36	PBSGS 016
400x500	5200	5080	120	32	PBSGS 001
450x500	5200	5080	122	36	PBSGS 017
500x500	5200	5080	124	40	PBSGS 002
400x600	6200	6080	142	32	PBSGS 004
450x600	6200	6080	144	36	PBSGS 005
500x600	6200	6080	147	40	PBSGS 018
400x700	7200	7080	163	32	PBSGS 006
450x700	7200	7080	166	36	PBSGS 019
500x700	7200	7080	168	40	PBSGS 007

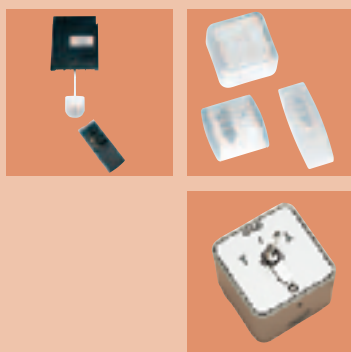

For recommendations on the right screen fabric and size, see pages 4-7 or consult the interactive screen selector at [www.projecta.nl](http://www.projecta.nl).